




Polyethylene Liner

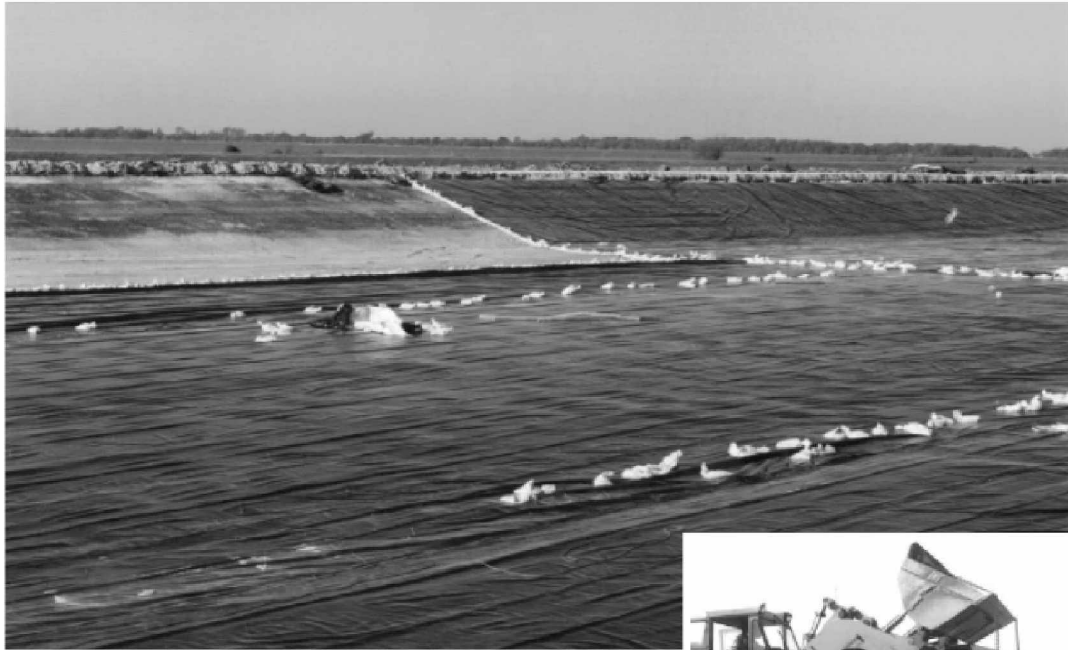

RAVEN
INDUSTRIES
Flexible Films Department

RUFECO 2000B, 3000B and 4000B are mono-layer membrane consisting of a very flexible, linear low-density polyethylene (LLDPE). LLDPE provide high elongation, tremendous tear resistance and bursting strength. A minimum carbon black content of 2.0% provide excellent protection from UV rays and harsh weather conditions. They do not contain plasticizer which can migrate to the surface, causing premature aging. Manufactured from virgin resin, RUFECO 2000B, 3000B and 4000B are designed to provide a high quality yet economical geomembrane.

RUFECO 2000B, 3000B and 4000B are used in applications that require excellent outdoor longevity and chemical resistance. They are very flexible materials that will conform to almost any surface. Rufco 3000B meet or exceed ASTM E-1745, Class "A" standard as an under lab vapor retarder.